

Revolabs HD Single / Dual Channel System — Polycom VTX 1000 Setup Guide

This setup guide will guide you through the steps needed to properly connect a Revolabs HD Single or Dual Channel System to a Polycom VTX 1000 Speakerphone.

Note: *It is important to carefully follow these instructions in order and completely. Otherwise your Revolabs Microphone System and/or the video codec may not function properly. Please read through these instructions completely before proceeding. Contact Revolabs technical support if you have any questions.*


Requirements for connecting systems:

1. Revolabs HD Single or Dual Channel System
2. Polycom VTX 1000 Speakerphone
3. QTY 1 3.5mm unbalanced male connector to RCA male connector cable*

* 07-35MUTORCA-01 6' 3.5mm unbalanced male connector to RCA male connector cable available from Revolabs

Connecting the Cables

1. Insert the unbalanced 3.5mm male connector to the CH 1 OUT port on the Single or Dual Channel System. If using a Single Channel, DIP Switch #1 should be "OFF". If using a Dual Channel, DIP Switch #1 should be "ON".
2. Insert the RCA male connector into the AUX IN
3. Verify that DIP Switch #3 (mic/line) is "OFF"

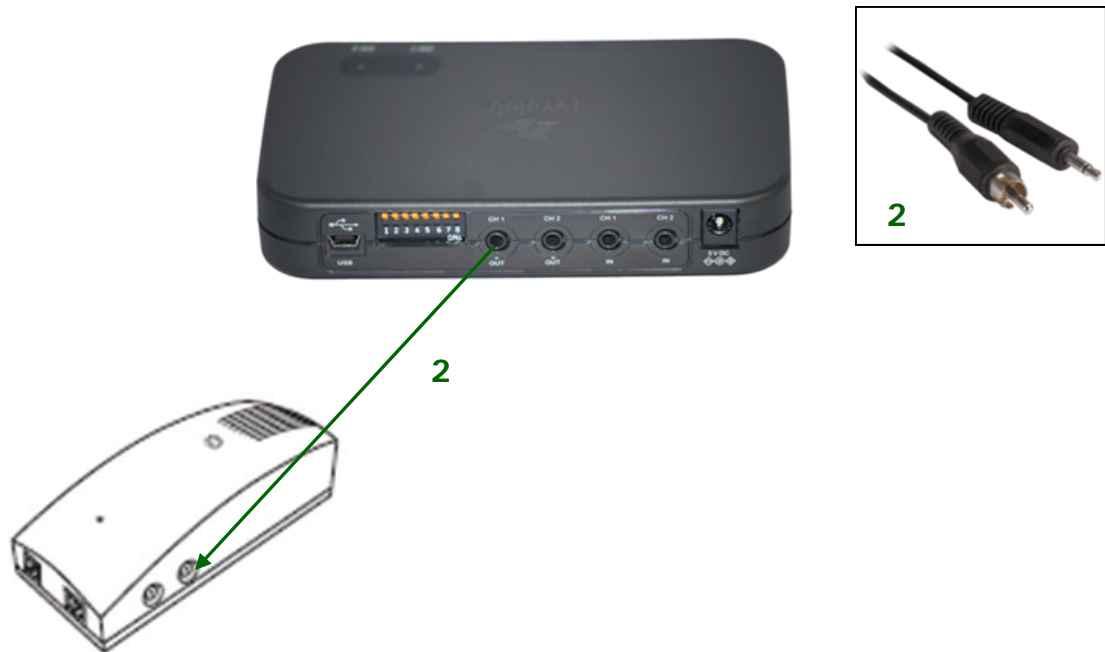

Configuring the Polycom VTX 1000 Speakerphone

1. Press MENU button
2. Scroll down to ADMIN SETUP then press SELECT
3. Scroll down to AUDIO SETUP then press SELECT
4. Scroll down to AUX INPUT then press SELECT
5. Use Soft Keys Right to select WIRELESS MIC then press SAVE